

# FI 12 ZW

## Luminaire: Profile, halogen, 1200W zoom 24°-50°, GX9.5



### Type

Conventional line

### Family

Profile

### Source

Halogen

### Power

1000W 1200W

### Connectors

Cable without plug

### Lamp holder

GX9.5

### Voltage

220-240V, 50-60Hz

### Product sizes

9.1Kg

### Pack sizes

332mm x 332mm x 787mm

10.7Kg

0.087m<sup>3</sup>

### DWG

Available on website


### User manual

Available on website


### Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Auto power-off by safety microswitch for maintenance and access into the lantern
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm

### Sizes (in mm)

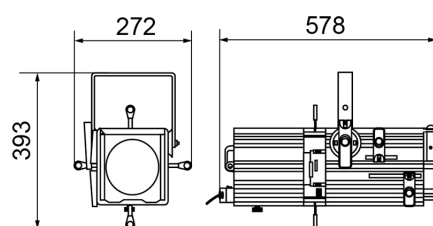

### Light output diagram



### Accessories

ARC STAGE/2	Yoke: 2-way DMX motorized
ARC STAGE/3	Yoke: 3-way DMX motorized
FUNE	Acc: Safety net with spring hook
GAC	Acc: Hook clamp for 40/50mm tube
HC/075	Acc: Half swivel coupler 75kg max
PL 4 U12	Acc: 4-door bamdoors
PO/2 SP12	Yoke: Pole Operated for Pan-Tilt
RS12	Acc: Safety net
TC S12	Acc: Colour frame

### LED equivalents

PR LED 200 ZW WW UD	Luminaire: Profile, LED, 200W, WW
PR LED 250Z W CW DMX	Luminaire: Profile, LED, 250W, CW
PR LED 250Z W WW DMX	Luminaire: Profile, LED, 250W, WW
PR LED 250Z W RGBWDMX	Luminaire: Profile, LED, 250W, RGBW
PR LED 200 ZW CW UD	Luminaire: Profile, LED, 200W, CW
PR LED 250Z W TW DMX	Luminaire: Profile, LED, 300W, TW
PR LED 200 ZW NW UD	Luminaire: Profile, LED, 200W, NW