

# COM 12 PC

Luminaire: PC, halogen, 1200W  
zoom 04°-63°, GX9.5



## Type

Conventional line

Family  
PC

Source  
Halogen

Power  
1000W 1200W

Connectors  
Cable without plug

Lamp holder  
GX9.5

Voltage  
220-240V, 50-60Hz

Product sizes  
6.8Kg

Pack sizes  
315mm x 505mm x 260mm

8.1Kg  
0.041m<sup>3</sup>


DWG  
Available on website

User manual  
Available on website


## Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 3-way pole operation for tilt, pan and focus
- ARC version on request, with 3-way DMX control of tilt, pan and focus

## Sizes (in mm)

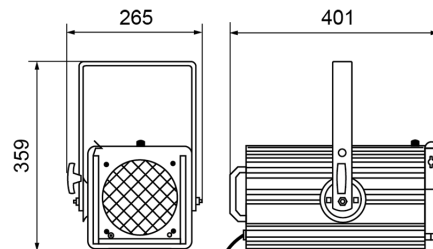

## Light output diagram



## Accessories

ARC STAGE/2	Yoke: 2-way DMX motorized
ARC STAGE/3	Yoke: 3-way DMX motorized
CP 70	Lamp: halogen 1000W 230V 3200K GX9.5
CP 90	Lamp: halogen 1200W 230V 3200K GX9.5
DOU-00001513	
FUNE	Acc: Safety net with spring hook
GAC	Acc: Hook clamp for 40/50mm tube
HC/075	Acc: Half swivel coupler 7.5kg max
PL 4 U12	Acc: 4-door barndoors
PO/2 SP12	Yoke: Pole Operated for Pan-Tilt
RS12	Acc: Safety net
T 19	Lamp: halogen 1000W 230V 3050K GX9.5
T 29	Lamp: halogen 1200W 230V 3050K GX9.5
TC S12	Acc: Colour frame

## LED equivalents

PC LED 250 RGBW DMX	Luminaire: PC, LED, 250W, RGBW
PC LED 250 TW DMX	Luminaire: PC, LED, 250W, WW
PC LED 250 WW DMX	Luminaire: PC, LED, 250W, WW
PC LED 250 CW DMX	Luminaire: PC, LED, 250W, CW