

EVO 12 DC ZS



Luminaire: Profile, discharge, 1200W Optical condenser, zoom 14°-27°, G22

Type

Conventional line

Family

Profile

Source

Discharge

Power

1200W

Connectors

Cable without plug

Lamp holder

GY22

Voltage

220-240V, 50-60Hz

Product sizes

15.6Kg

Pack sizes

350mm x 1025mm x 420mm

0.151m³

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Auto power-off by safety microswitch for maintenance and access into the lantern
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm

Sizes (in mm)

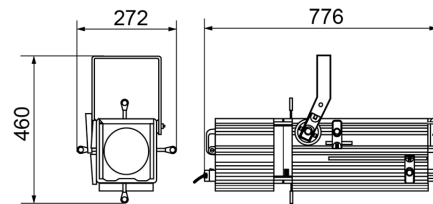

Light output diagram



Accessories

ARC STAGE/2	Yoke: 2-way DMX motorized
ARC STAGE/3	Yoke: 3-way DMX motorized
DIA 10	Acc: Iris diaphragm
DIA 10 BO	Acc: Iris diaphragm with blackout
FUNE	Acc: Safety net with spring hook
GAC	Acc: Hook clamp for 40/50mm tube
HC/075	Acc: Half swivel coupler 75kg max
PGB R 130	Acc: B size adjustable gobo-holder
PO/2 SP12	Yoke: Pole Operated for Pan-Tilt
TC S12	Acc: Colour frame

LED equivalents

PR LED 250Z S RGBWDMX	Luminaire: Profile, LED, 250W, RGBW
PR LED 250Z S TW DMX	Luminaire: Profile, LED, 250W, TW
PR LED 250Z S WW DMX	Luminaire: Profile, LED, 250W, WW
PR LED 250Z S CW DMX	Luminaire: Profile, LED, 250W, CW
PR LED 250Z N RGBWDMX	Luminaire: Profile, LED, 250W, RGBW
PR LED 250Z N TW DMX	Luminaire: Profile, LED, 250W, TW
PR LED 250Z N CW DMX	Luminaire: Profile, LED, 250W, CW
PR LED 250Z N WW DMX	Luminaire: Profile, LED, 250W, WW