

FI 12 ZW

Luminaire: Profile, halogen, 1200W zoom 24°-50°, GX9.5



Type

Conventional line

Family

Profile

Source

Halogen

Power

1000W 1200W

Connectors

Cable without plug

Lamp holder

GX9.5

Voltage

220-240V, 50-60Hz

Product sizes

9.1Kg

Pack sizes

332mm x 332mm x 787mm

10.7Kg

0.087m³

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Auto power-off by safety microswitch for maintenance and access into the lantern
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm

Sizes (in mm)

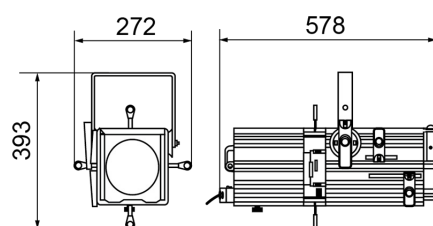

Light output diagram



Accessories

ARC STAGE/2

Yoke: 2-way DMX motorized

ARC STAGE/3

Yoke: 3-way DMX motorized

CP 70

Lamp: halogen 1000W 230V 3200K GX9.5

CP 90

Lamp: halogen 1200W 230V 3200K GX9.5

DOU-00001513

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 7.5kg max

PL 4 U12

Acc: 4-door bamdoors

PO/2 SP12

Yoke: Pole Operated for Pan-Tilt

RS12

Acc: Safety net

T 19

Lamp: halogen 1000W 230V 3050K GX9.5

T 29

Lamp: halogen 1200W 230V 3050K GX9.5

TC S12

Acc: Colour frame

LED equivalents

PR LED 200 ZW WW UD

Luminaire: Profile, LED, 200W, WW

PR LED 250Z W CW DMX

Luminaire: Profile, LED, 250W, CW

PR LED 250Z W WW DMX

Luminaire: Profile, LED, 250W, WW

PR LED 250Z W RGBWDMX

Luminaire: Profile, LED, 250W, RGBW

PR LED 200 ZW CW UD

Luminaire: Profile, LED, 200W, CW

PR LED 250Z W TW DMX

Luminaire: Profile, LED, 300W, TW

PR LED 200 ZW NW UD

Luminaire: Profile, LED, 200W, NW