

MI PR MC

Luminaire: Profile, discharge, 150W zoom 08°-20°-40°, G12



Type

Conventional line

Family

Profile

Source

Discharge

Power

150W

Connectors

Cable without plug

Lamp holder

G12

Voltage

220-240V, 50-60Hz

Product sizes

4.9Kg

Pack sizes

255mm x 615mm x 260mm

5.4Kg

0.041m³

IES/LDT

Available on website

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- 99,99% polished and treated aluminum reflector

Sizes (in mm)

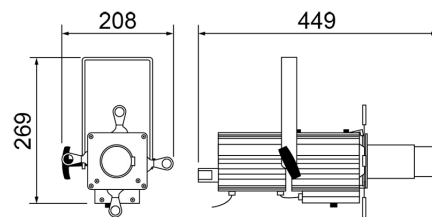

Light output diagram

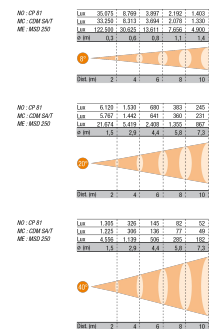

Accessories

BASE-Q122-AS

SQUARE BASE SET

FUNE

Acc: Safety net with spring hook

HC/075

Acc: Half swivel coupler 75kg max

MINI GAC

Acc: Hook clamp for 30mm tube

O/MINI 08

Acc: Objective narrow 8°

O/MINI 40

Objective large 40°

PGM MINI

Acc: M size adjustable gobo-holder

TC MINI

Acc: Colour frame

TD MINI

Acc: Colour frame dicro

TRK ROS-7705-B

Acc: Mechanical track adaptor -W

TRK ROS-7705-N

Acc: Mechanical track adaptor -B

LED equivalents

PR LED 50 Z S CW DMX

Luminaire: Profile, LED, 50W, CW

PR LED 50 Z S NW DMX

Luminaire: Profile, LED, 50W, NW

PR LED 50 Z S VW DMX

Luminaire: Profile, LED, 50W, VW